




V1-WSD-GWP2842567W27-345K LED Outdoor Wall Pack, CCT, Adjustable Wattage

The Vima Décor Outdoor LED Wall Pack provides traditional architectural style with high-performance illumination. The rugged design protects internal components while the exterior finish provides a lasting appearance in outdoor environments.

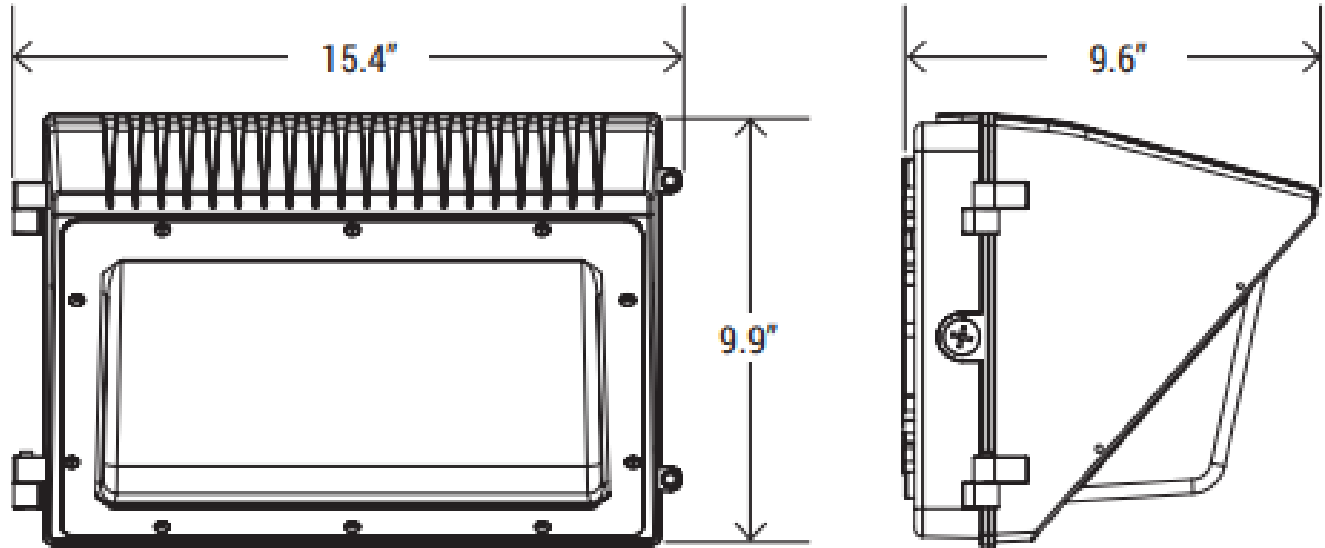

Product Name: LED Outdoor Wall Pack, CCT, Adjustable Wattage
Item Number: V1-WSD-GWP2842567W27-345K


Length (in): 15.4
Height (in): 9.9
Depth (in): 9.6
Wattage Options: 28W, 42W, 56W, 70W
Lumens: 4590, 6149, 7740, 9593 (based on wattage selection)
Color Temp Options: 3000K, 4000K, 5000K
Color Rendering Index (CRI): 70
Finish: Dark Bronze
Voltage: AC 120-277V
Includes Photocell Light Sensor
Rated for Outdoor Wet Use
DLC Listed, UL Certified



PHOTOMETRICS


WSD-GWP-05W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

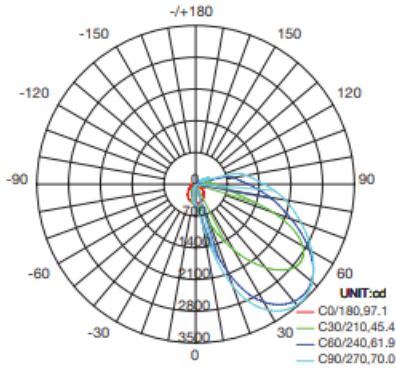


AVERAGE BEAM ANGLE(50%):68.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

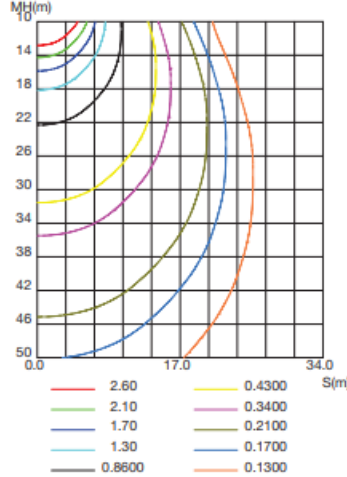


ISOLUX DIAGRAM

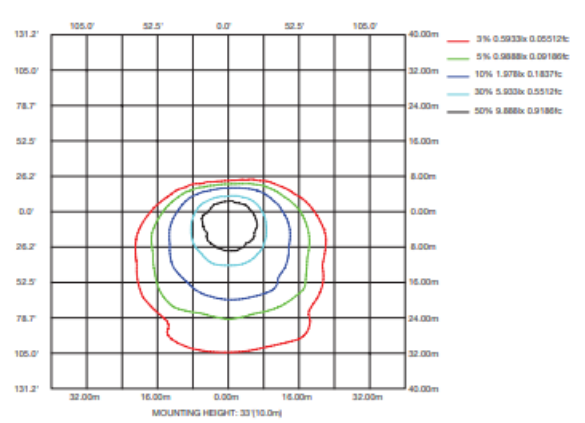


WSD-GWP-07W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

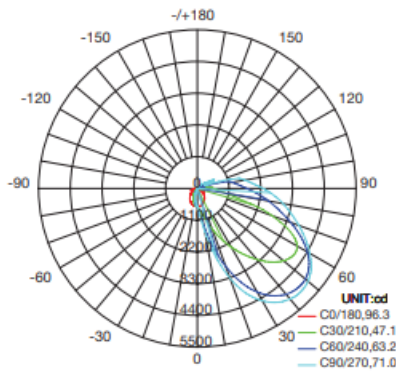


AVERAGE BEAM ANGLE(50%):69.4 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

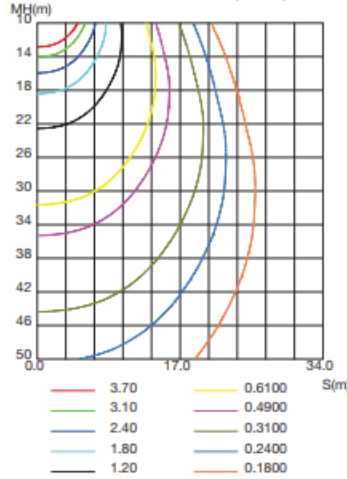


ISOLUX DIAGRAM

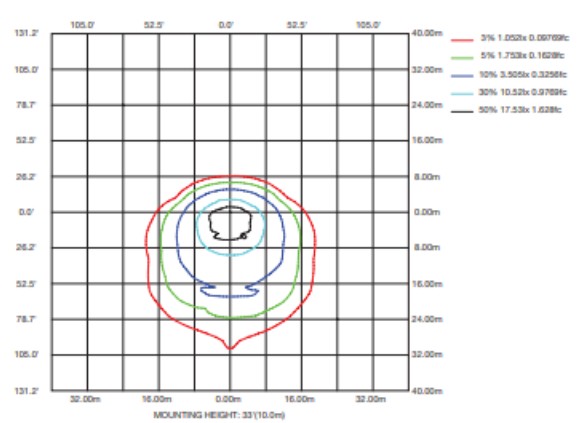


WSD-GWP-10W27-50K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

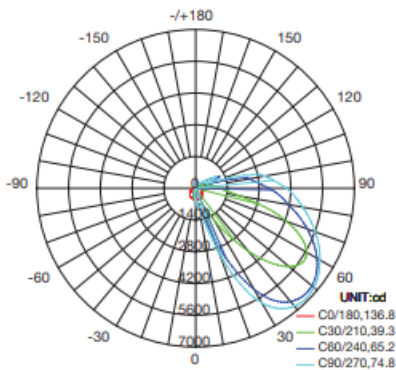


AVERAGE BEAM ANGLE(50%):79.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

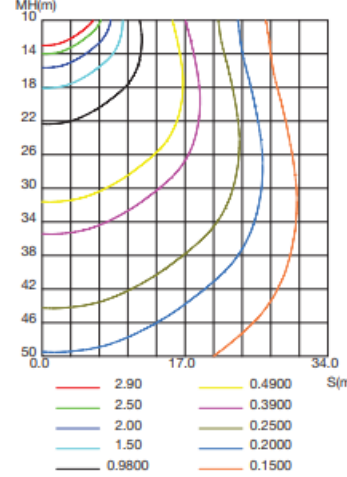


ISOLUX DIAGRAM

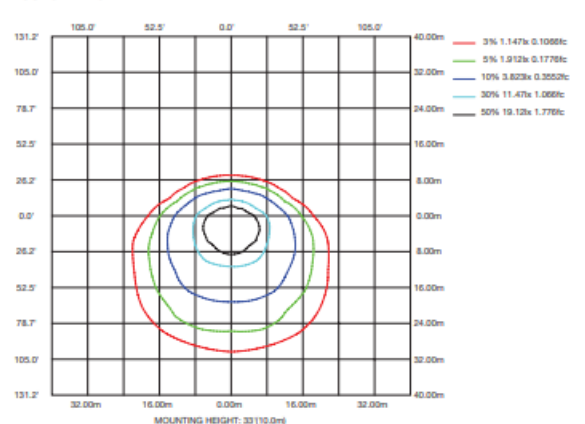


PHOTOMETRICS

WSD-GWP-3567W27-50K (30W@5000K)


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

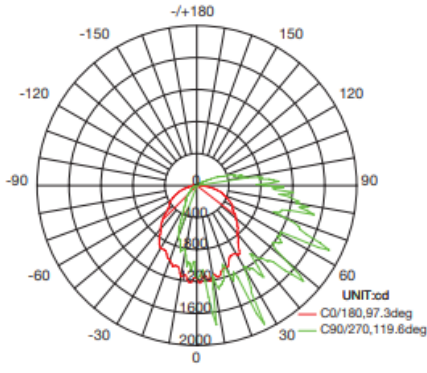

AVERAGE BEAM ANGLE(50%):108.5 DEG

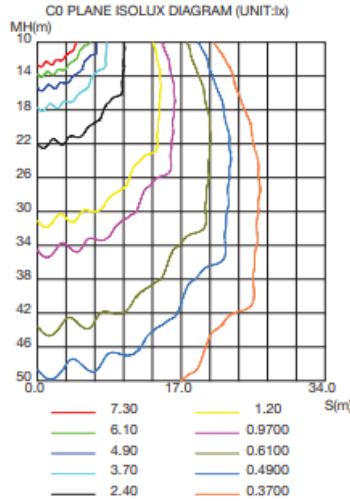


ISOLUX DIAGRAM

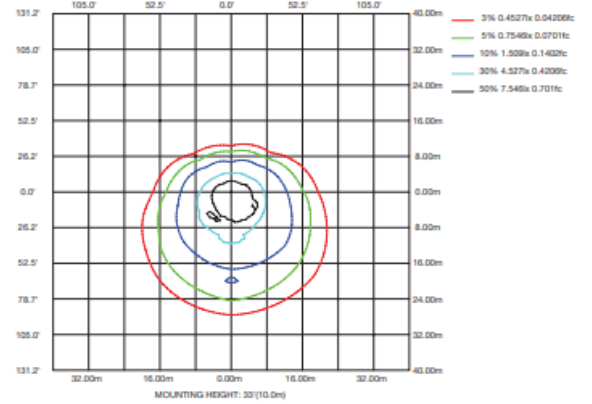


WSD-GWP-3567W27-50K (50W@5000K)


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

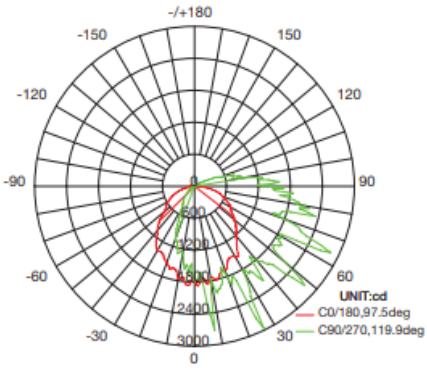

AVERAGE BEAM ANGLE(50%):108.7 DEG

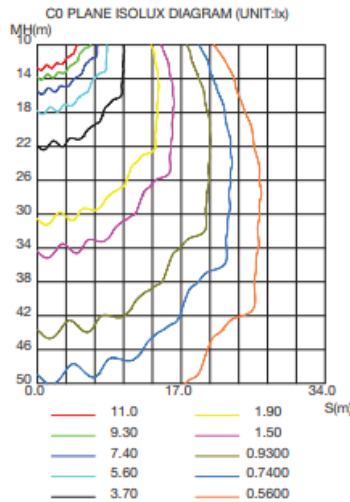


ISOLUX DIAGRAM

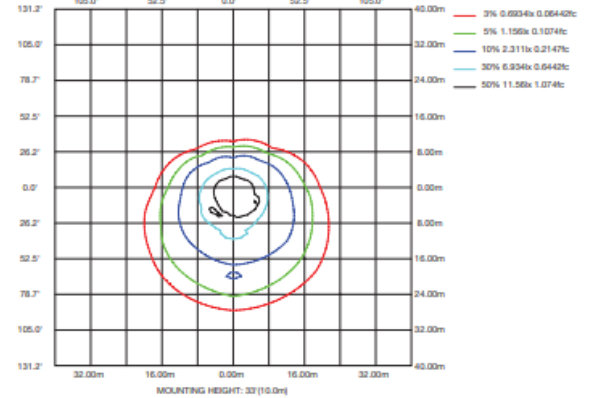


WSD-GWP-3567W27-50K (60W@5000K)


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

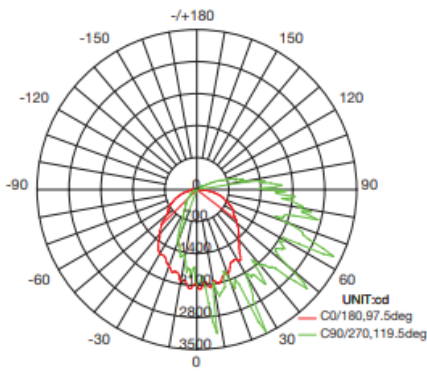

AVERAGE BEAM ANGLE(50%):108.5 DEG

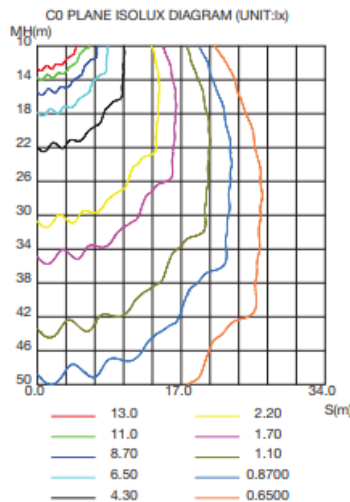


ISOLUX DIAGRAM

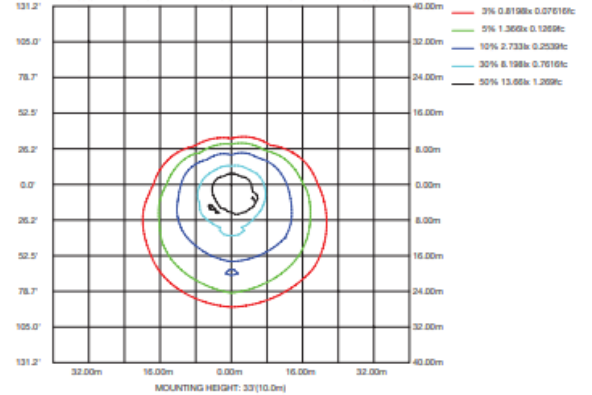


PHOTOMETRICS


WSD-GWP2842567W27-345K (28W&4000K)

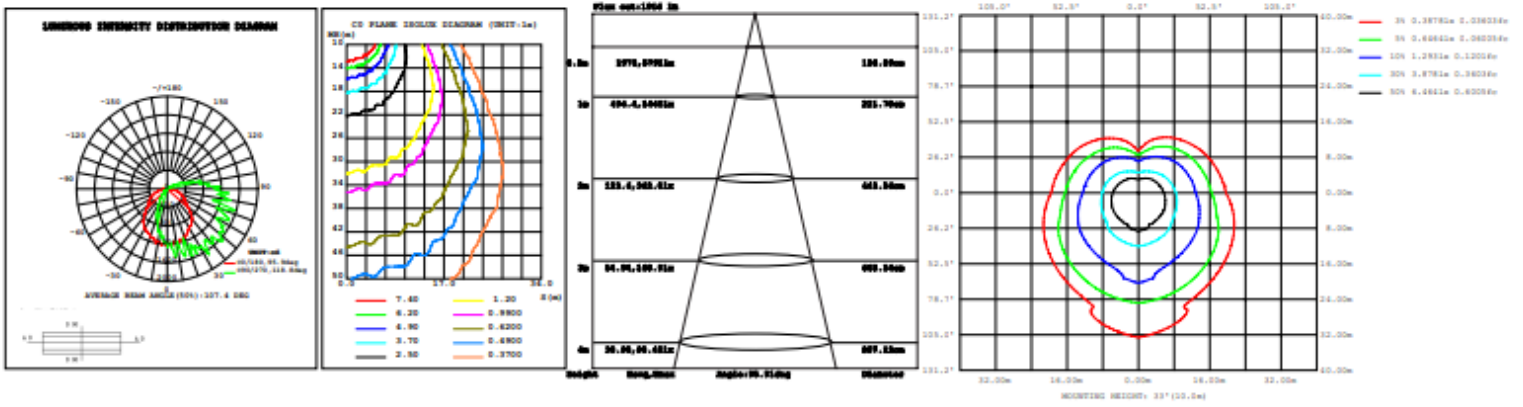

WSD-GWP2842567W27-345K (42W&4000K)

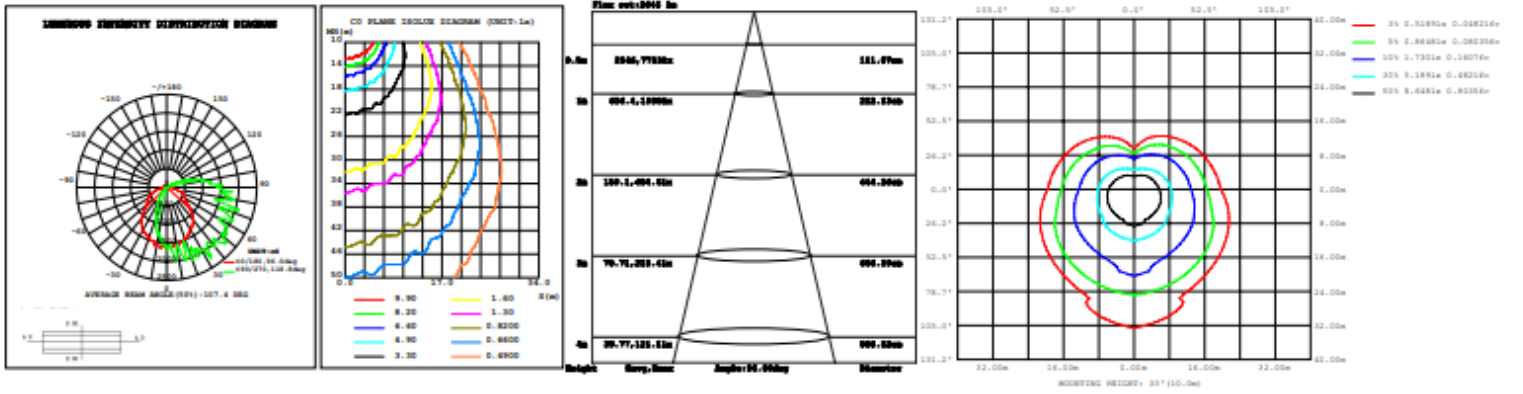


WSD-GWP2842567W27-345K (56W&4000K)

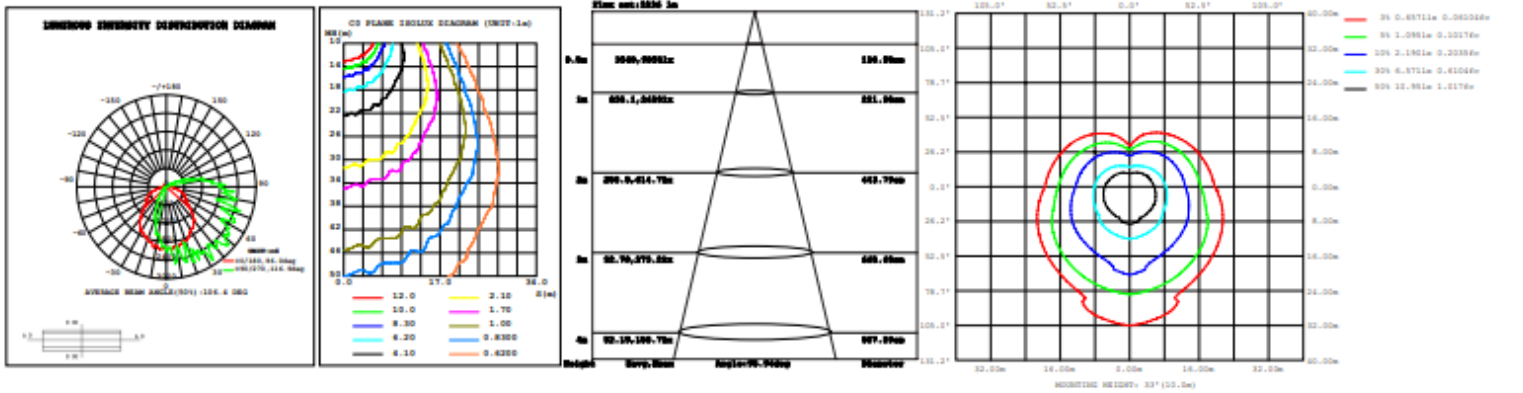


PHOTOMETRICS


WSD-GWP2842567W27-345K (70W&4000K)

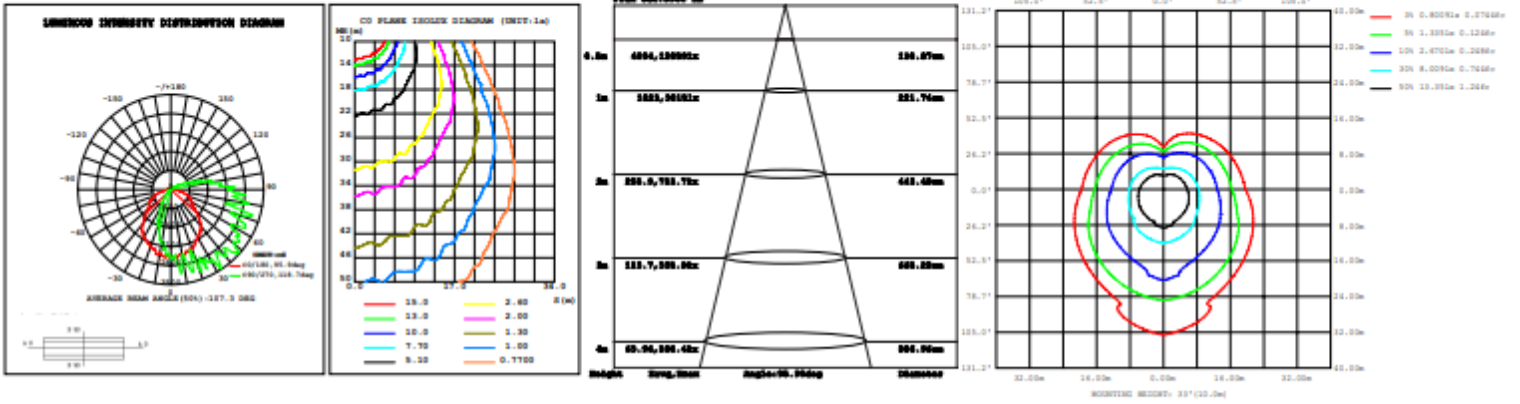

WSD-GWP48729612W27-345K (48W&4000K)

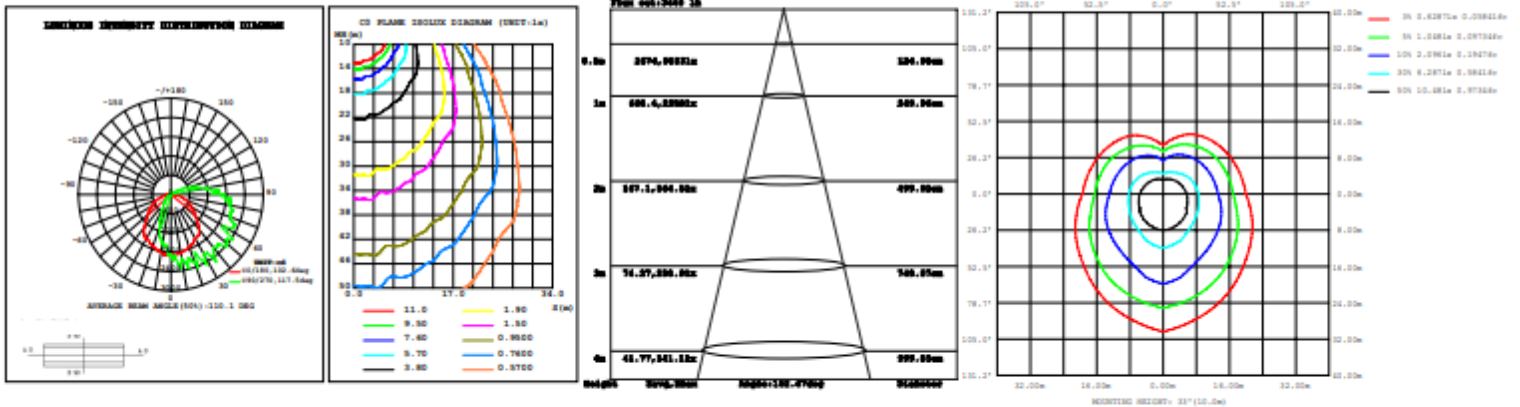


WSD-GWP48729612W27-345K (72W&4000K)

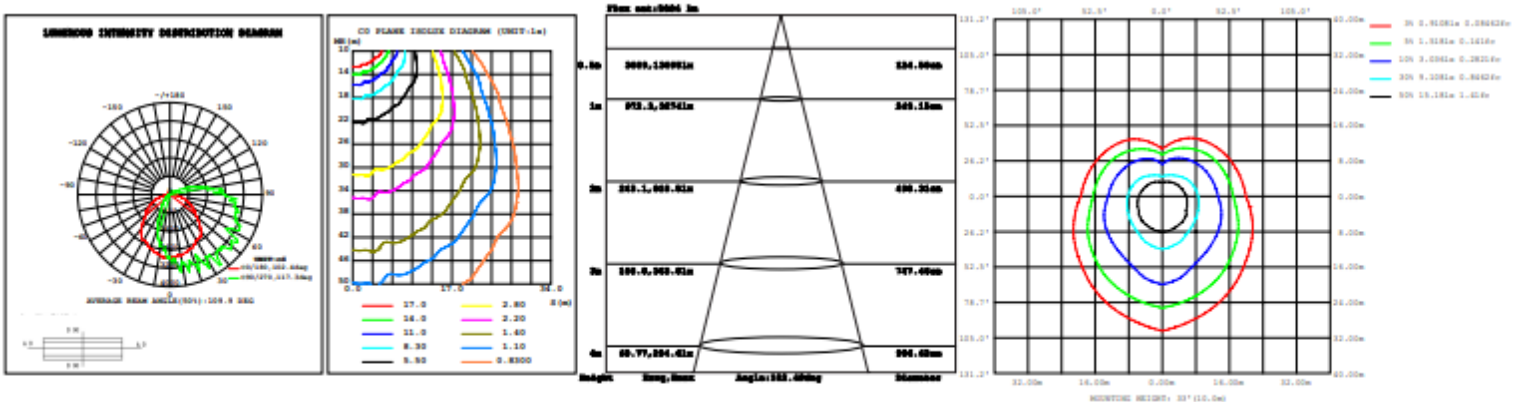

PHOTOMETRICS

WSD-GWP48729612W27-345K (96W&4000K)

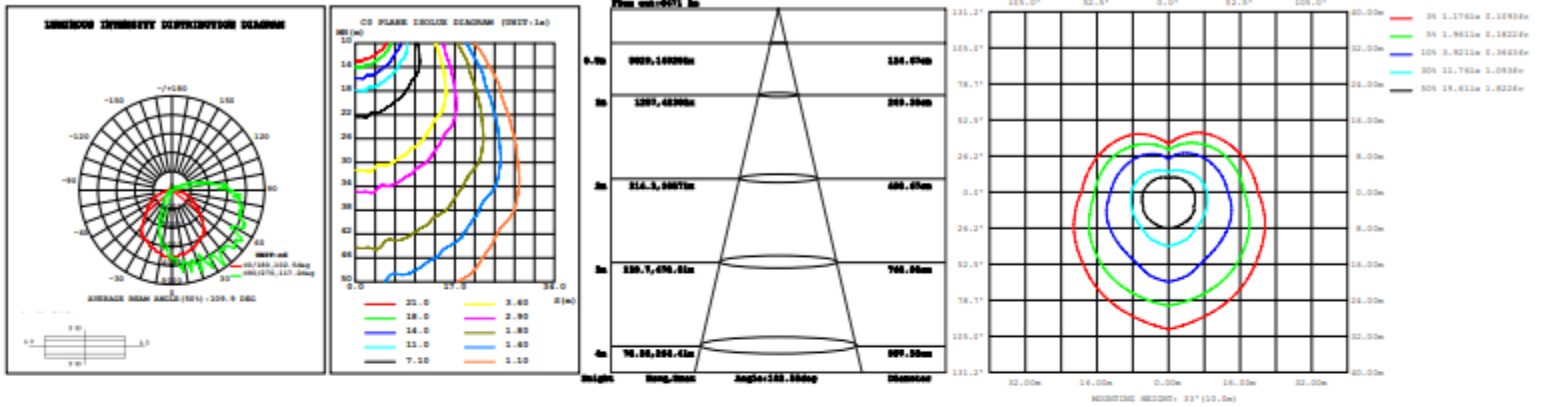

WSD-GWP48729612W27-345K (120W&4000K)

